



Amanero Combo384:

side of pin 1:


XTMS
XTDO
OUT_I2S_DATA/DSDL
OUT_I2S_CLK
OUT_I2S_FSCL/DSDR
OUT_MCLK
OUT_DSD_ON
GND
VCC_3.3V
VCC_3.3V

Side of pin 20:


XTCK_OUT_MUTE
XTDI
GND
GND
GND
DSD64_128
FS0
FS1
FS2
FS3

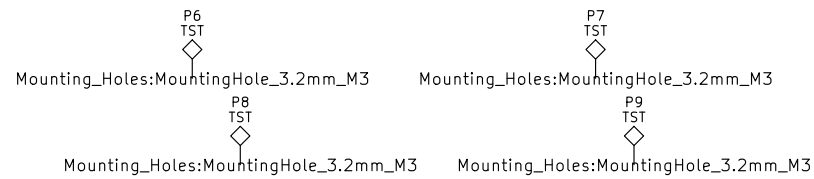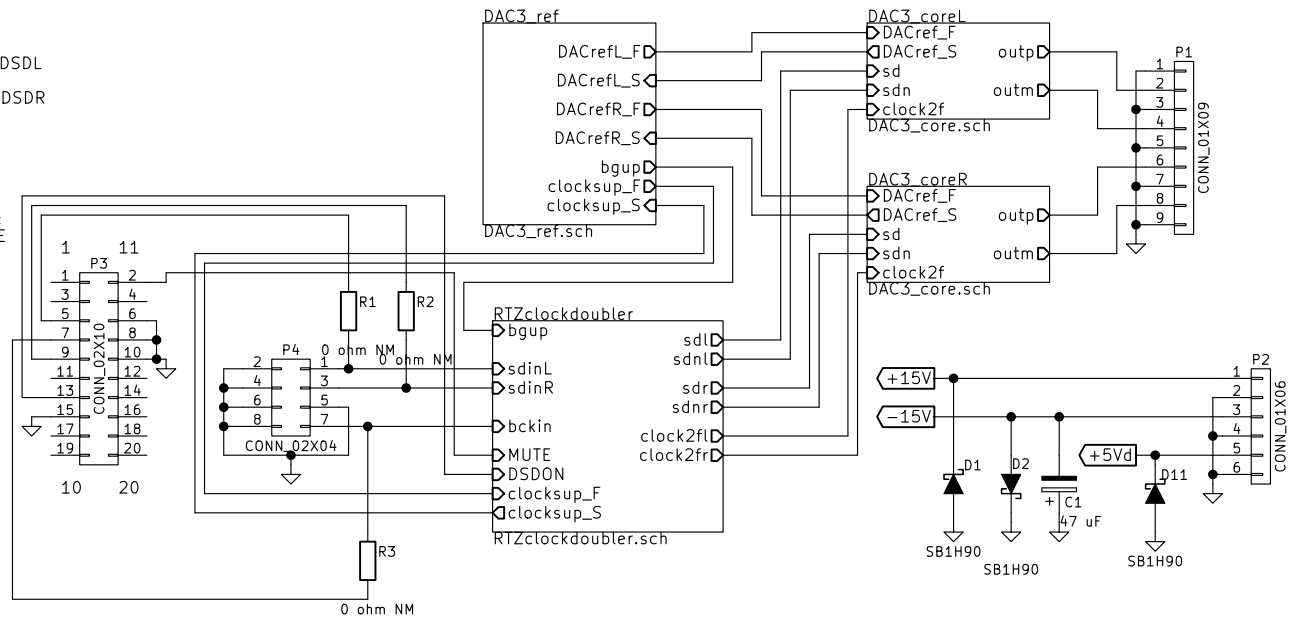

R4:
1k114029104 with NST...-transistors -> 1k1 or 1k13 E96
1k004298009 with BCM's -> 1 kohm E96

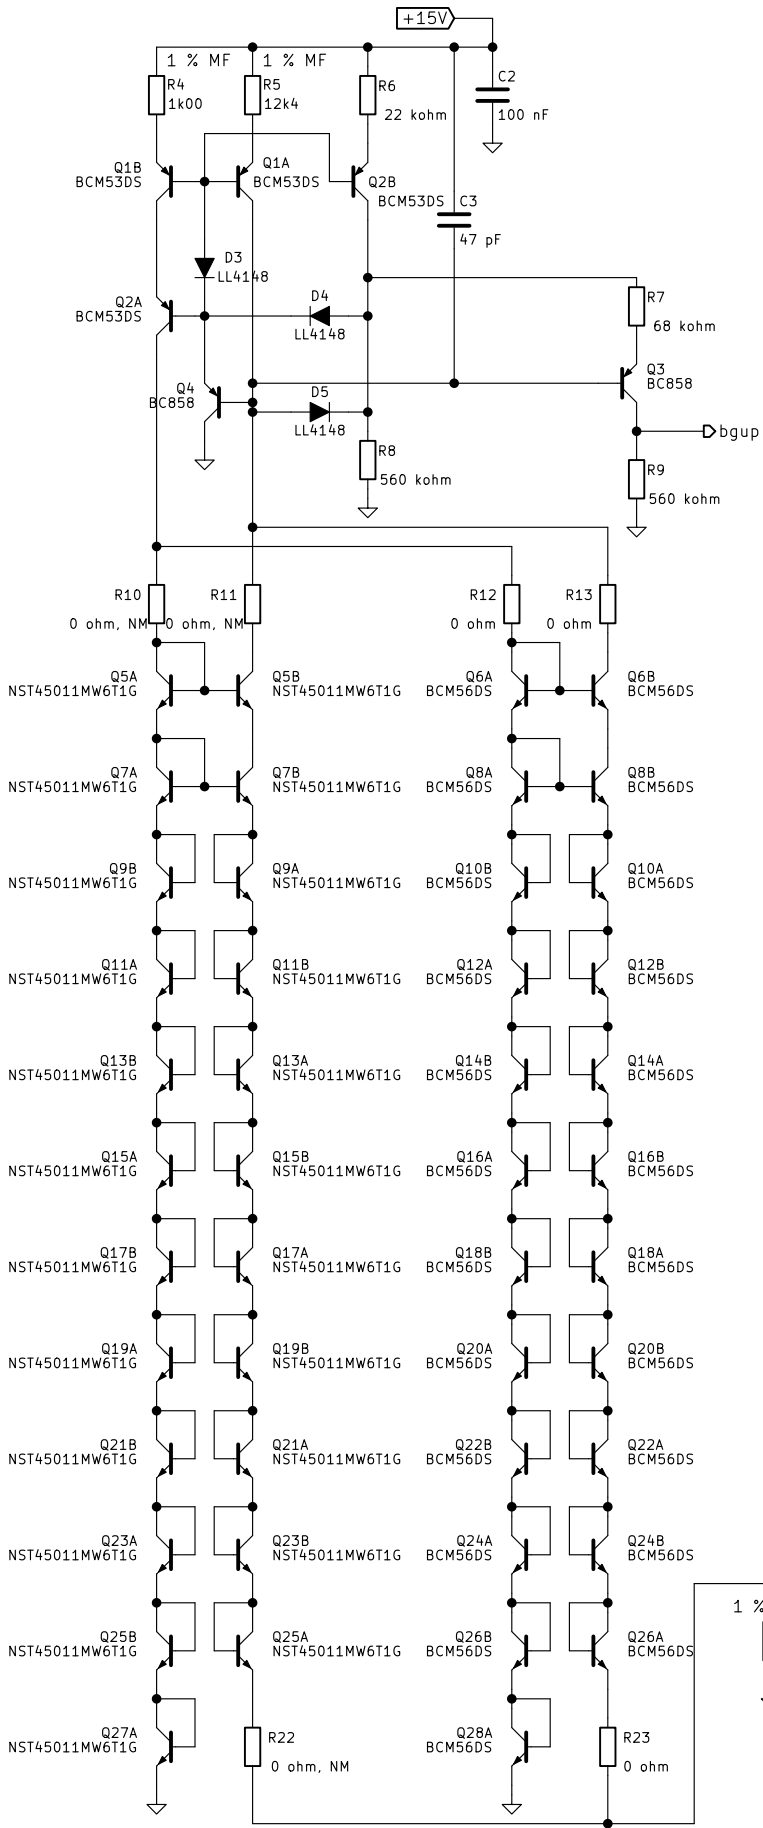

1 % MF:
+/- 1 %, 0.6 W through-hole metal film resistors

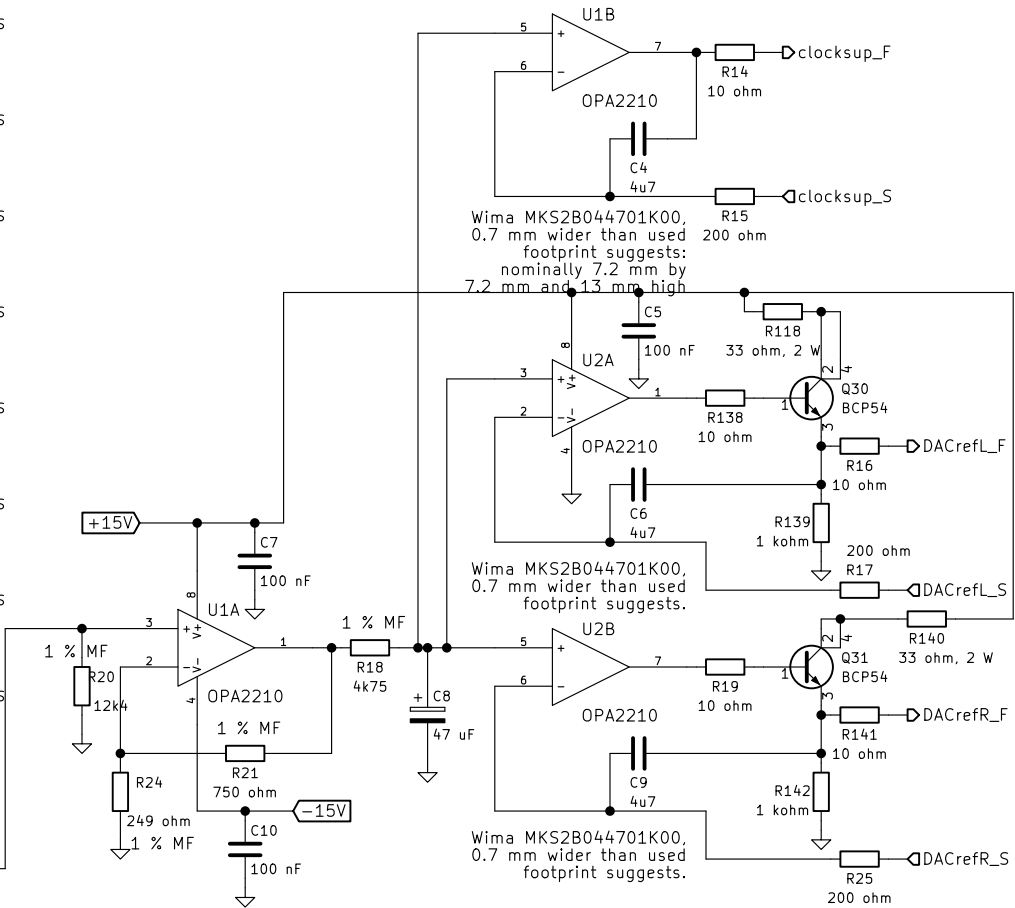

All DAC and filter resistors thin film

