


Y23 Range Transformer Mechanical Drawing

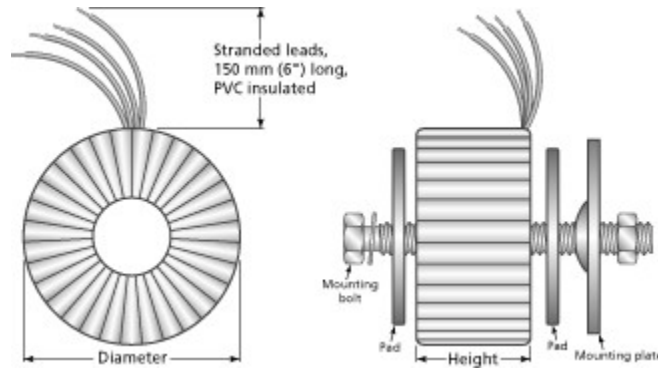

Y23 Range Transformer Mounting Specifications

Load (VA)	Mounting Plate	Bolt
15, 30, 50	50 mm dia. x 1 mm thick (2.0" dia. x .04" thick)	M5 x 40 mm
63, 80, 100, 120	70 mm dia. x 1 mm thick (2.8" dia. x .04" thick)	M6 x 50 mm
160, 230, 330	90 mm dia. x 1 mm thick (3.6" dia. x .04" thick)	M6 x 60 mm
500, 625, 800, 1000	110 mm dia. x 1 mm thick (4.3" dia. x .04" thick)	M6 x 80 mm

All types also include 2 insulating pads, 2mm (.08") thick (uncompressed)

Y23 Range Transformer Connections

Note: Windings may be connected in parallel or in series.
If they are isolated from each other, the applied potential between them must not exceed 250 V DC.

