
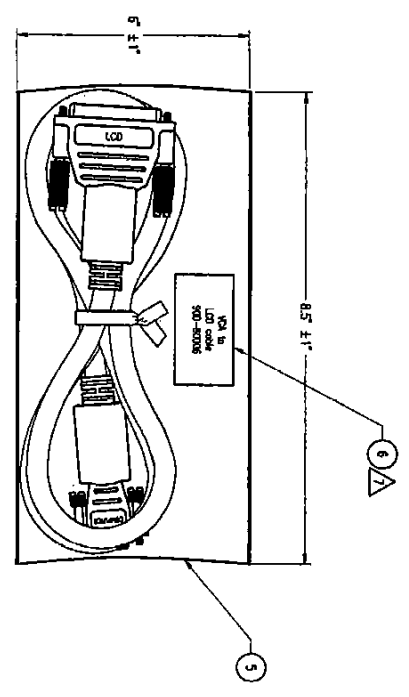
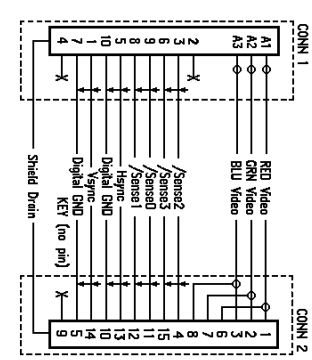


Part No.	Rev.	QTY	UNIT	DESCRIPTION
1	1	1	PCB	PCB
2	1	1	PCB	PCB
3	1	1	PCB	PCB
4	1	1	PCB	PCB
5	1	1	PCB	PCB
6	1	1	PCB	PCB
7	1	1	PCB	PCB
8	1	1	PCB	PCB
9	1	1	PCB	PCB
10	1	1	PCB	PCB
11	1	1	PCB	PCB
12	1	1	PCB	PCB
13	1	1	PCB	PCB
14	1	1	PCB	PCB
15	1	1	PCB	PCB

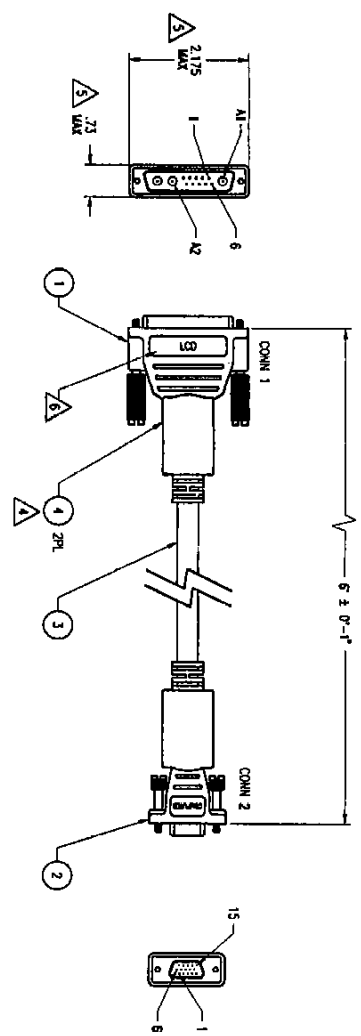

Part No.	Rev.	QTY	UNIT	DESCRIPTION
1	1	1	PCB	PCB
2	1	1	PCB	PCB
3	1	1	PCB	PCB
4	1	1	PCB	PCB
5	1	1	PCB	PCB
6	1	1	PCB	PCB
7	1	1	PCB	PCB
8	1	1	PCB	PCB
9	1	1	PCB	PCB
10	1	1	PCB	PCB
11	1	1	PCB	PCB
12	1	1	PCB	PCB
13	1	1	PCB	PCB
14	1	1	PCB	PCB
15	1	1	PCB	PCB
16	1	1	PCB	PCB
17	1	1	PCB	PCB
18	1	1	PCB	PCB
19	1	1	PCB	PCB
20	1	1	PCB	PCB
21	1	1	PCB	PCB
22	1	1	PCB	PCB
23	1	1	PCB	PCB
24	1	1	PCB	PCB
25	1	1	PCB	PCB
26	1	1	PCB	PCB
27	1	1	PCB	PCB
28	1	1	PCB	PCB
29	1	1	PCB	PCB
30	1	1	PCB	PCB
31	1	1	PCB	PCB
32	1	1	PCB	PCB
33	1	1	PCB	PCB
34	1	1	PCB	PCB
35	1	1	PCB	PCB
36	1	1	PCB	PCB
37	1	1	PCB	PCB
38	1	1	PCB	PCB
39	1	1	PCB	PCB
40	1	1	PCB	PCB
41	1	1	PCB	PCB
42	1	1	PCB	PCB
43	1	1	PCB	PCB
44	1	1	PCB	PCB
45	1	1	PCB	PCB
46	1	1	PCB	PCB
47	1	1	PCB	PCB
48	1	1	PCB	PCB
49	1	1	PCB	PCB
50	1	1	PCB	PCB
51	1	1	PCB	PCB
52	1	1	PCB	PCB
53	1	1	PCB	PCB
54	1	1	PCB	PCB
55	1	1	PCB	PCB
56	1	1	PCB	PCB
57	1	1	PCB	PCB
58	1	1	PCB	PCB
59	1	1	PCB	PCB
60	1	1	PCB	PCB
61	1	1	PCB	PCB
62	1	1	PCB	PCB
63	1	1	PCB	PCB
64	1	1	PCB	PCB
65	1	1	PCB	PCB
66	1	1	PCB	PCB
67	1	1	PCB	PCB
68	1	1	PCB	PCB
69	1	1	PCB	PCB
70	1	1	PCB	PCB
71	1	1	PCB	PCB
72	1	1	PCB	PCB
73	1	1	PCB	PCB
74	1	1	PCB	PCB
75	1	1	PCB	PCB
76	1	1	PCB	PCB
77	1	1	PCB	PCB
78	1	1	PCB	PCB
79	1	1	PCB	PCB
80	1	1	PCB	PCB
81	1	1	PCB	PCB
82	1	1	PCB	PCB
83	1	1	PCB	PCB
84	1	1	PCB	PCB
85	1	1	PCB	PCB
86	1	1	PCB	PCB
87	1	1	PCB	PCB
88	1	1	PCB	PCB
89	1	1	PCB	PCB
90	1	1	PCB	PCB
91	1	1	PCB	PCB
92	1	1	PCB	PCB
93	1	1	PCB	PCB
94	1	1	PCB	PCB
95	1	1	PCB	PCB
96	1	1	PCB	PCB
97	1	1	PCB	PCB
98	1	1	PCB	PCB
99	1	1	PCB	PCB
100	1	1	PCB	PCB

- NOTES: UNLESS OTHERWISE SPECIFIED
- CONNECTOR 1 SPECIFICATIONS:
- TYPE - 15C1
  - CABLE CONTENT - 50 IN. FLASH
  - NO. CONNECTIONS - 15
  - ENDER - 10 PLUG PIN & 3 JACK COAX
  - BACKSHELL - METAL
  - ENCLOSURE - BLACK WOLDED CONN. FERITE & THUMB SCREWS APPROX AS SHOWN
- CONNECTOR 2 SPECIFICATIONS:
- TYPE - HD-22
  - CABLE CONTENT - 50 IN. FLASH
  - NO. CONNECTIONS - 15
  - ENDER - 15, 200W
  - BACKSHELL - METAL
  - ENCLOSURE - BLACK WOLDED CONN. FERITE & THUMB SCREWS APPROX AS SHOWN
- CABLE (2) SPECIFICATIONS:
- TYPE - 3.75 IN. DIA. COAX
  - GAUGE - 28 STRD TND COPPER
  - UL - 2819
  - INSULATION - SEMI-ROD PVC
  - LENGTH - 6 FT
  - COLOR - RED, GRN, BLU
  - SHIELD TYPE - 2 ROD BRAD
- OVERALL - BLACK INSULATION
- UL - 2819
  - SHIELD TYPE - 2 ROD BRAD & WIRE WITH DRAIN WIRE
4. FAR-ITE PRODUCTS CORPORATION, USE APPROPRIATE SHIELD BEAD FERITE PART NUMBER IN CORRELATION WITH Q.D. OF CABLE AS FOLLOWS:
- 2843540002 FOR Q.D. - 23
  - 2843540002 FOR 24 - 30
  - 2843585102 FOR 31 - 375
5. WOLDED ENCLOSURE MAXIMUM DIMENSIONS SHOWN, SHOULD MATCH APPROPRIATE STANDARDS FOR QUALITY DESIGN.
6. MARKING SPECIFICATIONS:
- CONN 1 - "LOT" & "CROQ-6" FS
  - CONN 2 - "COMPTON"
7. 10 LABEL NOMENCLATURE AS SHOWN AND WITH COUNTRY OF ORIGIN.
8. DRAIN WIRE MUST HAVE DIRECT ELECTRICAL CONTACT WITH BOXSHELL AT BOTH ENDS OF CABLE.

10. FAR-ITE PRODUCTS CORPORATION, USE APPROPRIATE SHIELD BEAD FERITE PART NUMBER IN CORRELATION WITH Q.D. OF CABLE AS FOLLOWS: