

REF-100MKII



SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- * Nominal Impedance: 8 ohm
- * Recommended Amp Power: 10-100W
- * Frequency Response: 70 Hz - 25 kHz (-6dB)
- * Sensitivity: 90 dB / 2.83V / 1 m
- * Crossover frequency: 4 kHz

SYSTEM COMPONENTS:

- * Cabinet: CREF-100MKII (Not for sale)
- * Grille: GREF-100MKII (2408280)
- * Woofer: W70410-8 130mm Woofer (2)
Coated Paper

SYSTEM COMPONENTS: (cont'd)

- * Tweeter: TW010JL19 Gold 10mm
Gold plated polymer dome tweeter
- * Crossover Network: NREF-100 MKII (2708390)


PHYSICAL SPECIFICATIONS:

- * Enclosure Dimensions (H.W.D): 7,1x18,2x9,6 In. D
(180x462x244mm D)
- * Shipping Weight: 20 lbs. (9 kg.)


WARRANTY INFORMATION:

- * Refer to the Warranty Statement packed with each product

PACKAGE

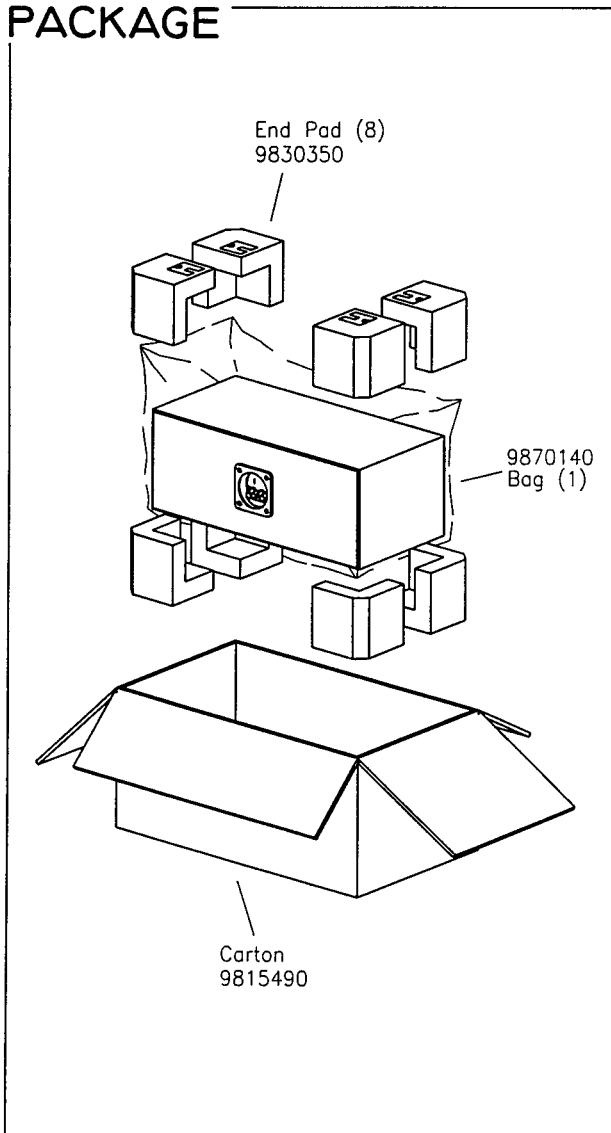


WIRING DIAGRAM

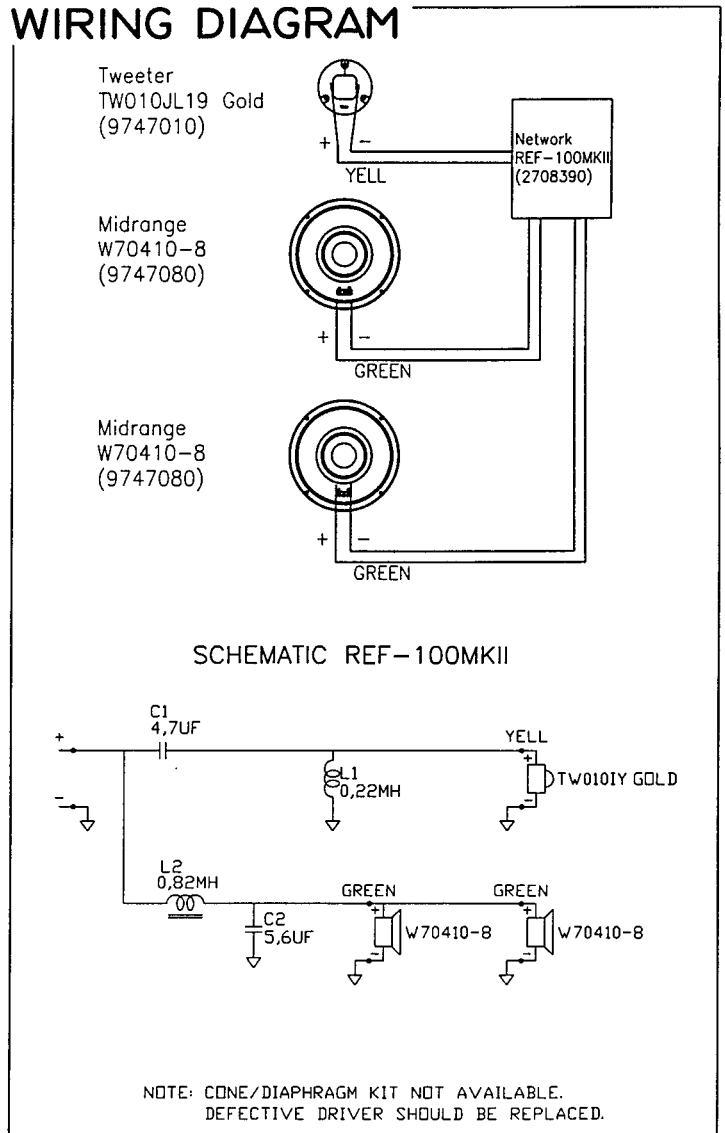

REF-100MKII

REF-100MKII

COMPONENT EXPLODED VIEW

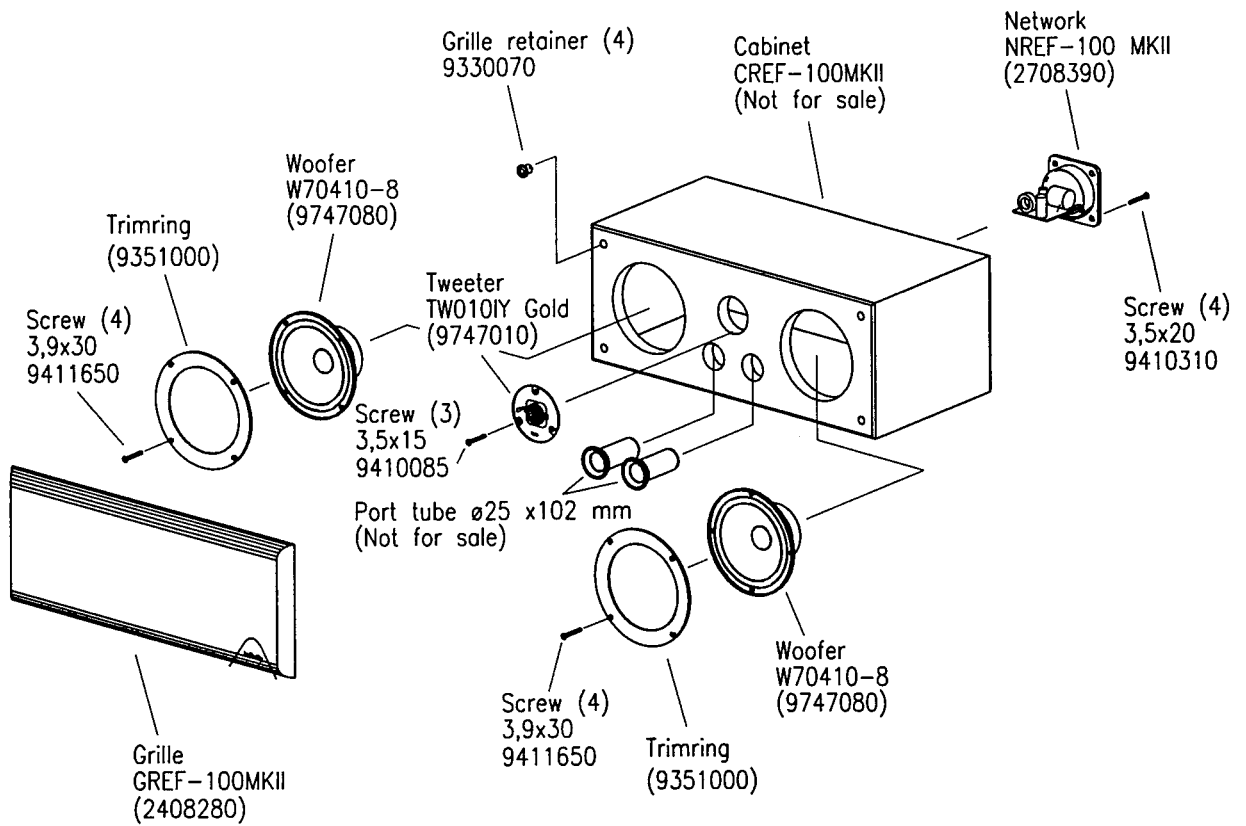

REF-100MKII