

Filter Simulation with VituixCAD and EQ APO

Reid Towsley - Jan 14, 2022

Revision History:

Date	Description
Jan 14, 2022	Initial Release

With meticulous passive filter design, it may be beneficial to hear the result before spending money on crossover parts and putting in the time to assemble the crossover. Fortunately, with VituixCAD and EQ APO and filter can be simulated digitally. This process can simulate multiple drivers simultaneously, one driver for each output on a soundcard, for example a 7.1 soundcard could simulate a stereo 3 way system utilizing 6 channels.

Note that an emulated passive filter will reproduce the filter transfer function as a digital filter entered into a DSP, it does not provide exactly the same result as a real passive filter due to different source impedance and component features. Passive filter interaction with the driver non-linearities and back EMF for example will not be present in a digital simulation.

VituixCAD Process

1. Once you have a complete design ready for simulation in VituixCAD, simply select “Impulse Response” under the view menu.
2. Select the sample rate that your soundcard is set to for playback.
3. FFT Length can be set to the maximum value of 262144 for maximum resolution.
4. Taps can be set quite high as well, 8192 taps should cover most uses.
5. Select IR Window as desired, since we are exporting a full frequency response, it is not extremely important, however I have used “cosine”.
6. Uncheck “Center IR”
7. Set Pre-delay at 1.0ms
8. Under Signals to export, select “Driver in D...” for each driver in your system. Up to 6 drivers can be exported at once.
9. Select “Export” and export the impulse response as IEEE mono or stereo WAV file.

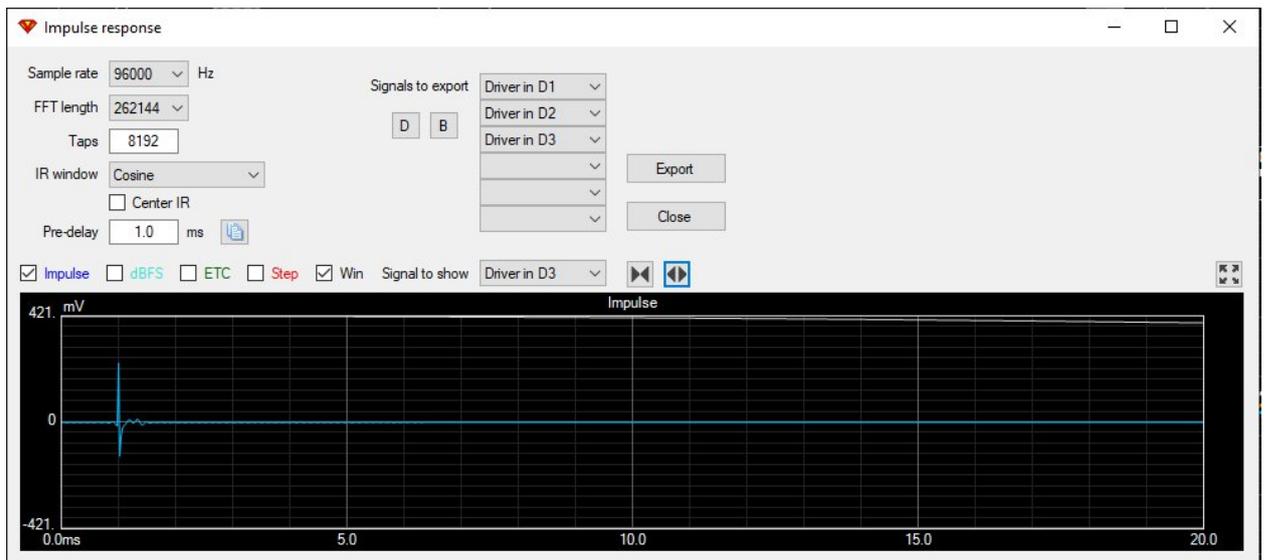


Figure 1 Impulse Response Window

EQ APO Process

1. Open the EQ APO Configuration Editor and configure the rack starting with the preamplifier, then channel selection, then convolution with impulse response. Repeat channel selection and convolution filter for each driver in your system. For the example screenshot below, the soundcard only includes 2 outputs, with 1 driver loaded for left output, and 1 driver loaded for right output.
2. Verify that each impulse response is loaded correctly using the analysis panel at the bottom, and select each channel to cycle through each filter transfer function.
3. Adjust the preamplifier if needed to ensure that all responses for all channels are shown at <0dB level. Responses >0dB will be filled in with red to appear obvious.
4. That's it, play some music and enjoy!

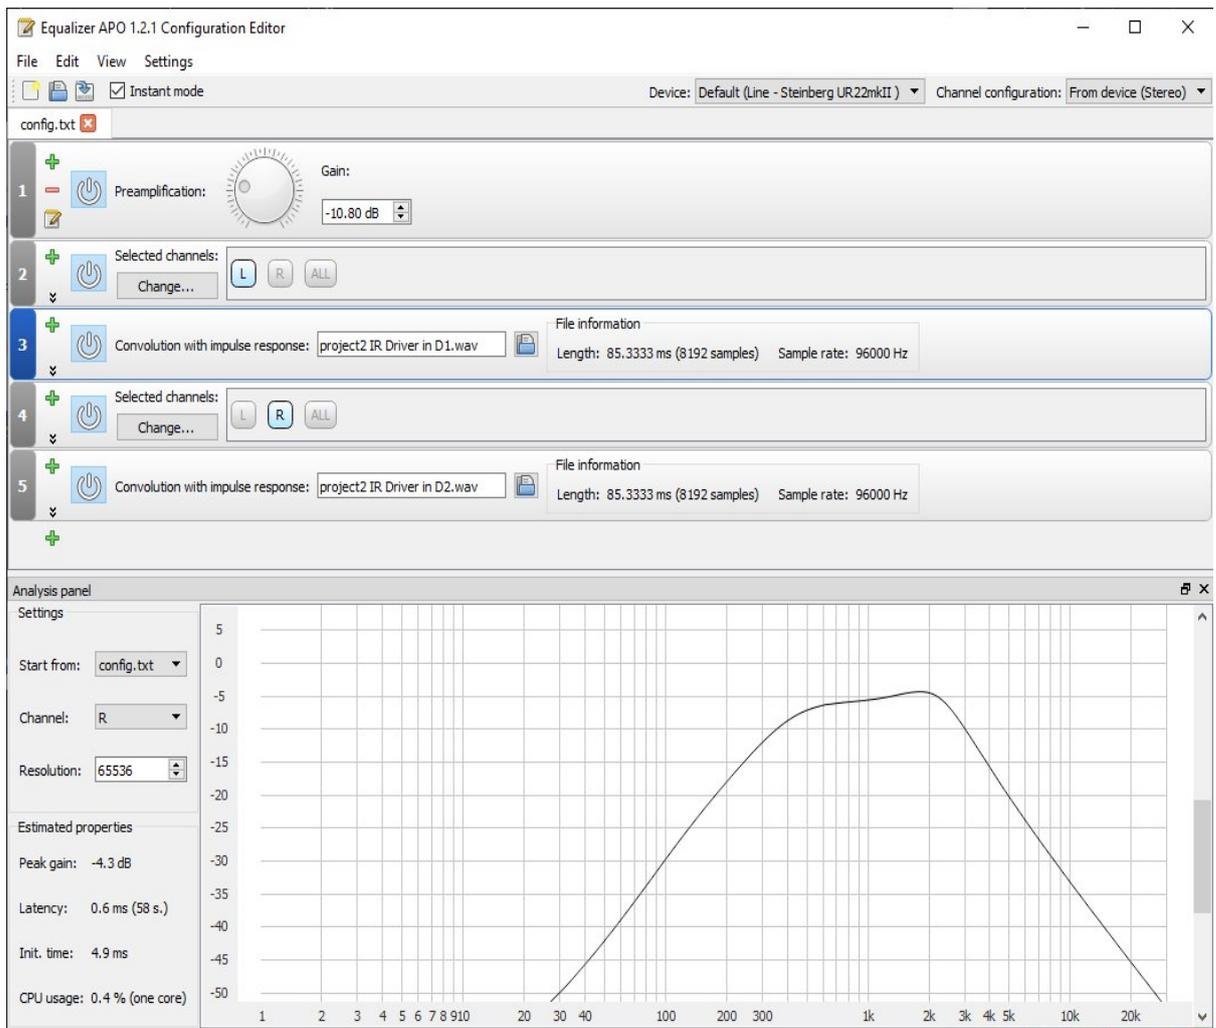


Figure 2 EQ APO Configuration