

# REF-61MKII



## SPECIFICATIONS

### ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- \* Nominal Impedance: 6 ohm
- \* Recommended Amp Power: 10-150W
- \* Frequency Response: 35 Hz - 25 kHz (-6dB)
- \* Sensitivity: 90 dB / 2,83V / 1 m
- \* Crossover frequency: 600 Hz-4 kHz

### SYSTEM COMPONENTS:

- \* Cabinet: CREF-61 MKII (Not for sale)
- \* Grille: GREF-61 MKII (2408240)
- \* Midrange: W70410-1 100mm Midrange Coated Paper
- \* Woofer: W70410-6 210mm Woofer (2) Coated Paper

### SYSTEM COMPONENTS: (cont'd)

- \* Tweeter: TW010IY Gold 10mm Gold Plated Polymer dome tweeter
- \* Crossover Network: NREF-61 MKII (2708360)


### PHYSICAL SPECIFICATIONS:

- \* Enclosure Dimensions (H.W.D): 42,1x10x12 in. D (1070x253,5x307mm D)
- \* Shipping Weight: 48,5 lbs. (22 kg.)


### WARRANTY INFORMATION:

- \* Refer to the Warranty Statement packed with each product


## PACKAGE

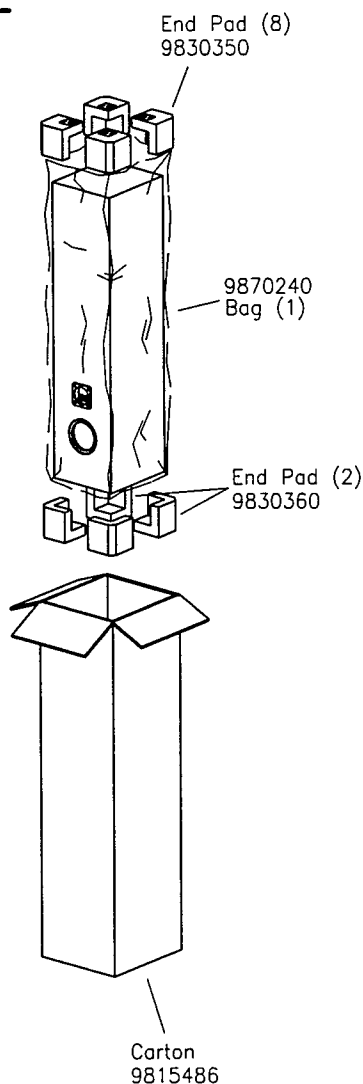

## WIRING DIAGRAM

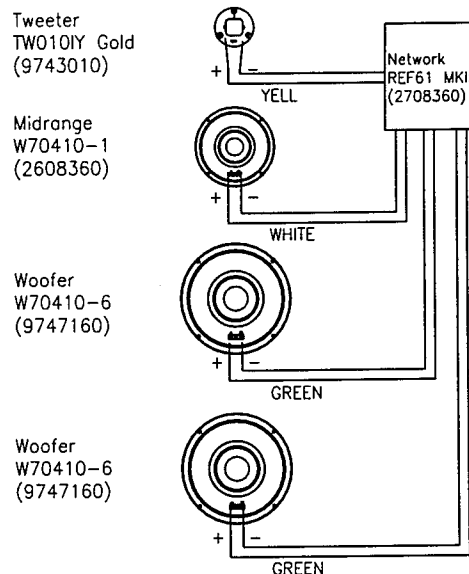

### SCHEMATIC REF-61 MKII

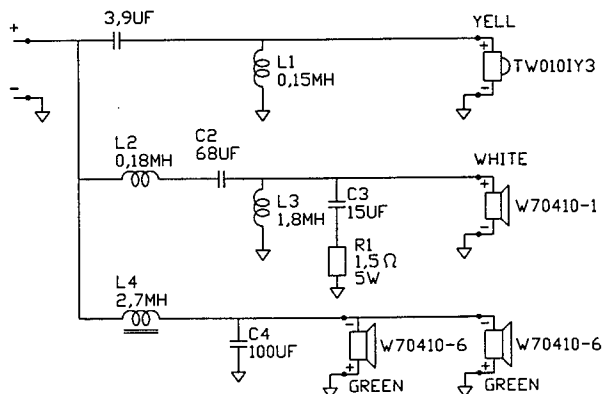


NOTE: CONE/DIAPHRAGM KIT NOT AVAILABLE.  
DEFECTIVE DRIVER SHOULD BE REPLACED.

Valid from serial no. 02101  
26/11-1997

REF-61MKII

# REF-61MKII

## COMPONENT EXPLODED VIEW

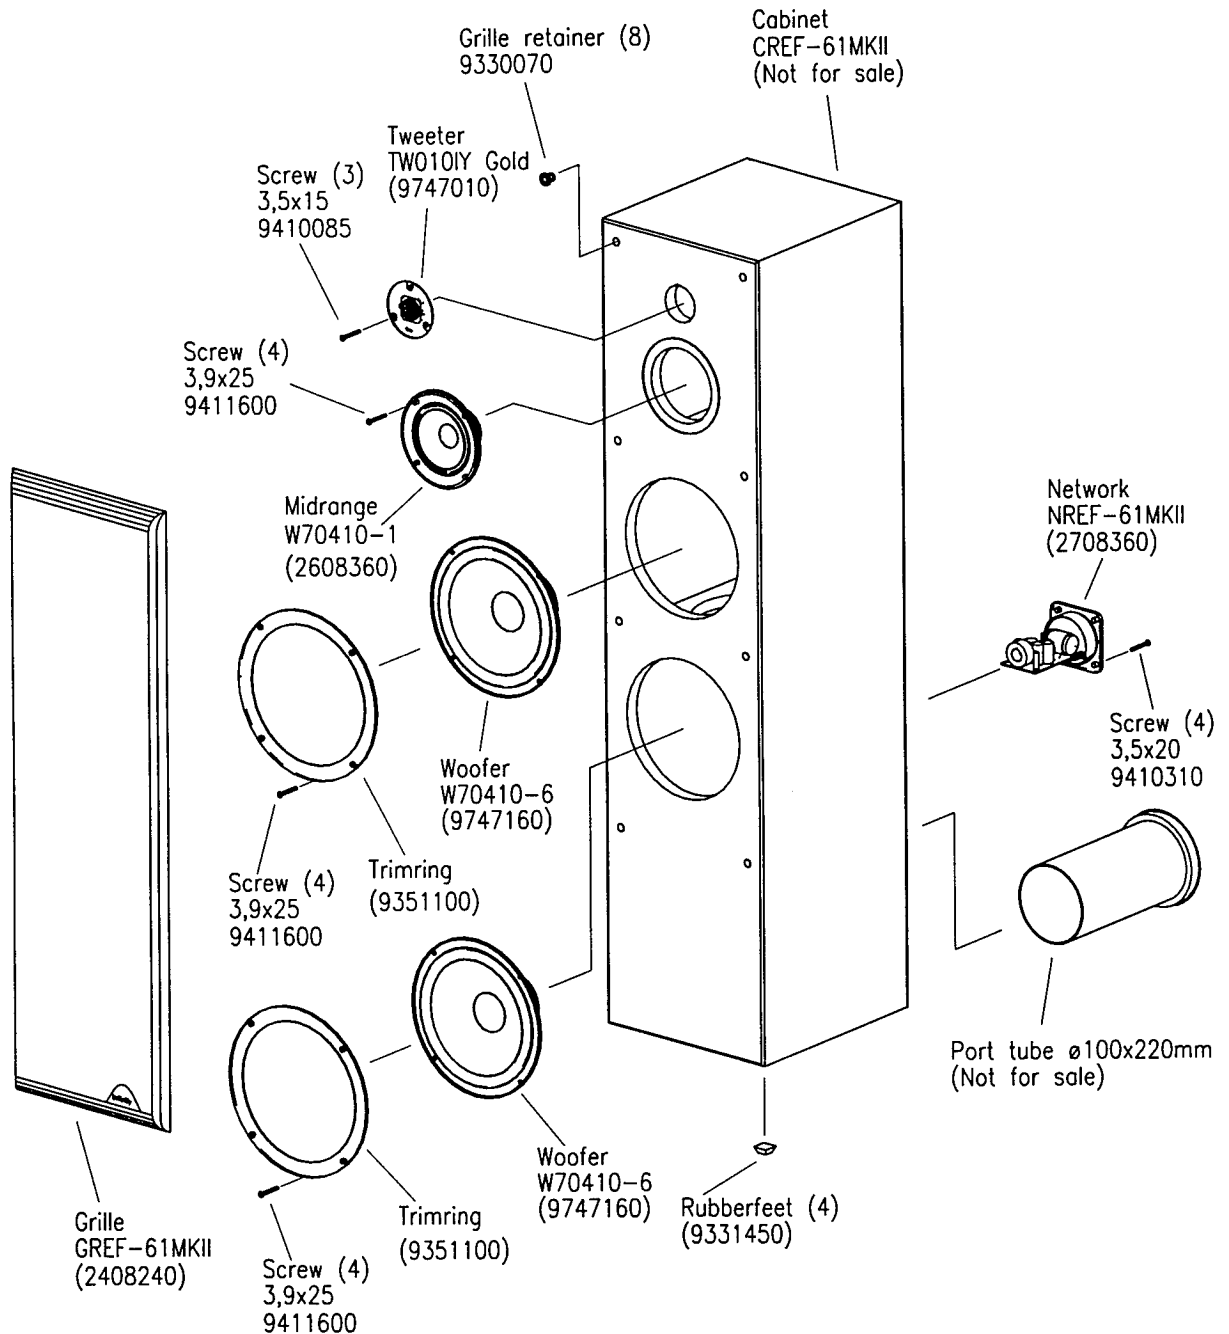

From serial no. 01001-02100 following modification.  
 Magnet on midrange.  
 Port tube  $\varnothing 100 \times 220$ mm  
 Modified units with blue label

REF-61MKII