


TABAQ MICRO for Tang Band W2 803 SM

By Bjorn Johannesen, bjohannesen@post.cybercity.dk, designed with software, which is the property of Martin J. King, <http://quarter-wave.com/>. Please feel free to build it for your own private pleasure. I have not finished the build, so my own test is pending.

Summed SPL

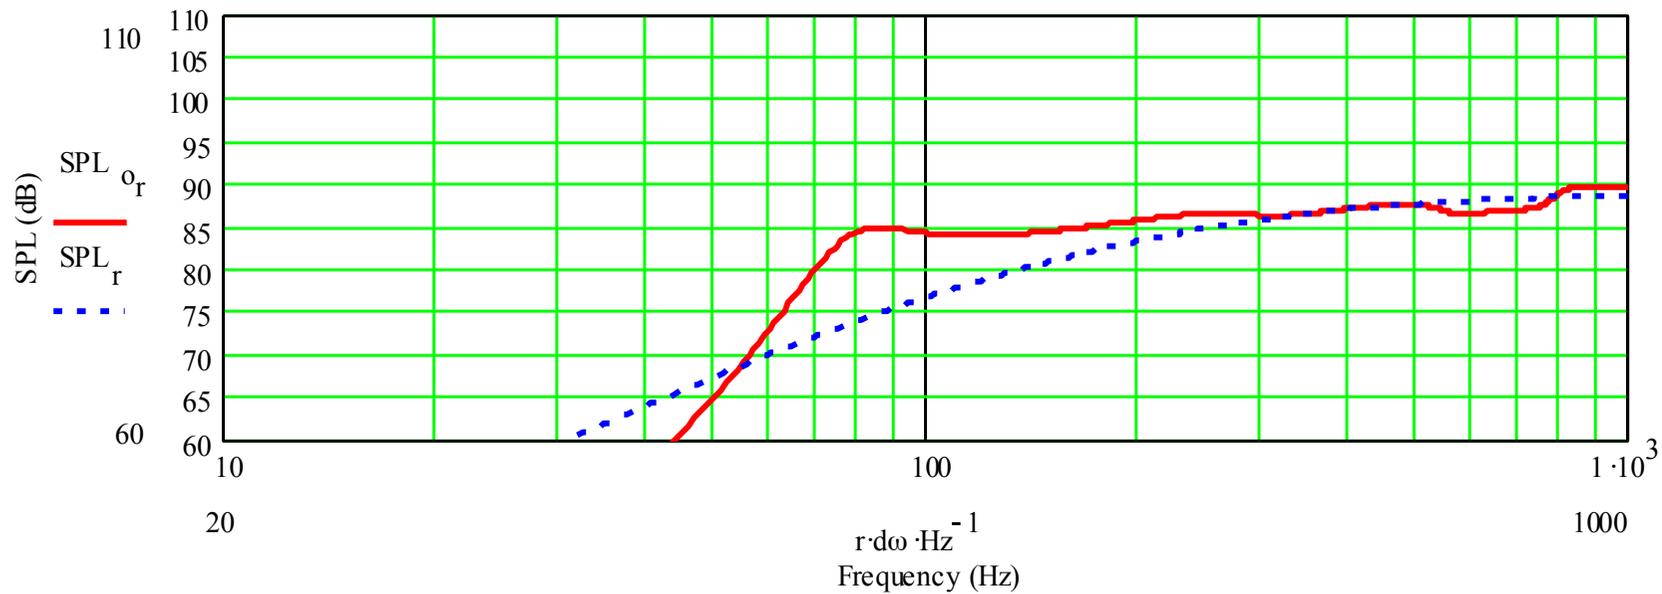

Baffle step Circuit

3,9 ohm

1.0 mH

- In parallel

Stuffing



Upper 2/3: 38 gram

Last 1/3 towards the opening: 6 gram

Opening is not stuffed

9 mm

1	620 x 70	Front
1	639 x 70	Back
2	639 x 111	Side
2	88 x 111	Top Bottom
1	67 x 70	Port

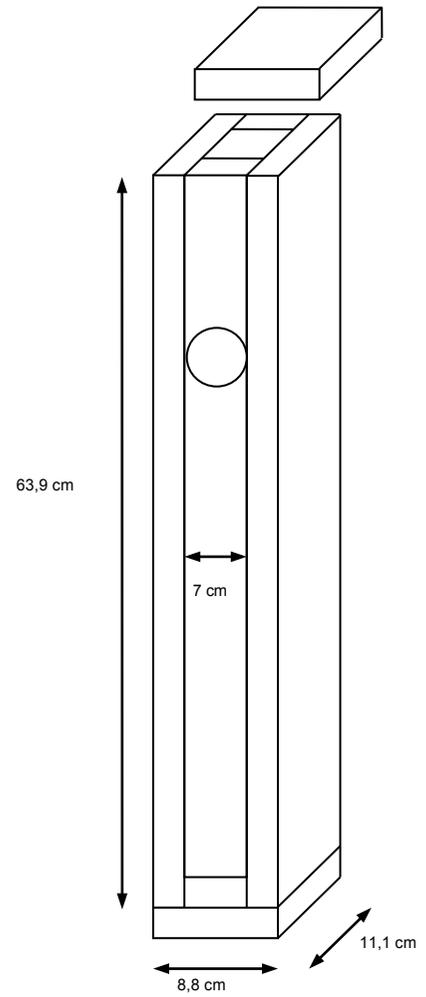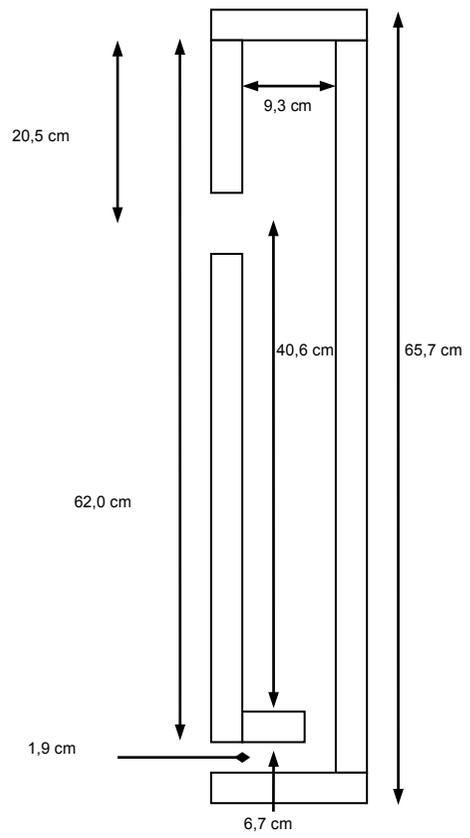

Tuning of the cabinet is about 80 Hz

