

Technical Manual

MX-1500

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- * Nominal Impedance: 4 ohm
- * Recommended Amp Power: 10-125 W
- * Frequency Response: 40 Hz - 25 kHz (-6dB)
- * Sensitivity: 90 dB / 2,8V / 1 m
- * Crossover frequency: 900 HZ / 3,5 KHZ

SYSTEM COMPONENTS:

- * Cabinet: CMX-1500 (Not for sale)
- * Grille: GMX-1500 (2404520)
- * Woofer: A0708A 210mm Woofer
25mm voice coil.
DC Resistance: 3,4 ohm
- * Midrange: A0704A 100mm Midrange
20mm voice coil.
DC Resistance: 3,0 ohm

SYSTEM COMPONENTS: (cont'd)

- * Tweeter: A0701A
DC Resistance: 5,7 ohm
- * Crossover Network: NMX-1500 (2704520)


PHYSICAL SPECIFICATIONS:

- * Enclosure Dimensions (H.W.D): 35,4x9,8x12,4 In. D
(900x250x315mm D)
- * Shipping Weight: 28,3 lbs. (13 kg.)


WARRANTY INFORMATION:

- * Refer to the Warranty Statement packed with each product

PACKAGE

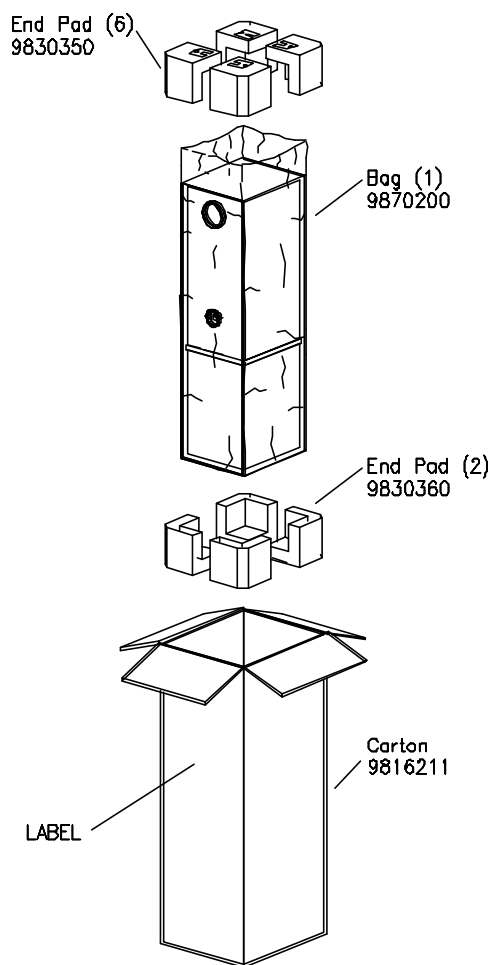

SCHEMATIC

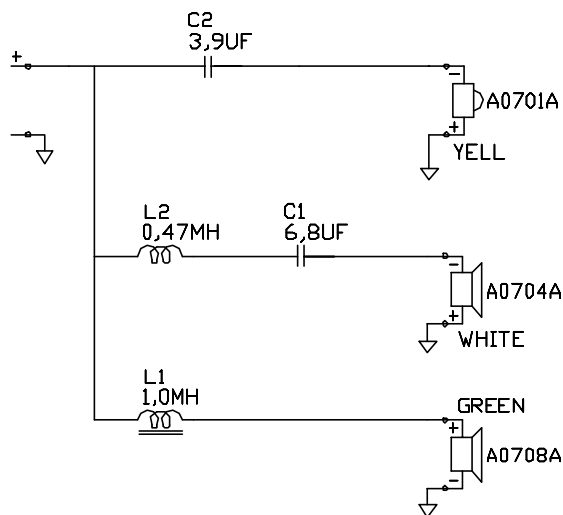


NOTE: CONE/DIAPHRAGM KIT NOT AVAILABLE.
DEFECTIVE DRIVER SHOULD BE REPLACED.

Valid from serial no. 01001
Rev. 20/4-1999

MX-1500

MX-1500

COMPONENT EXPLODED VIEW

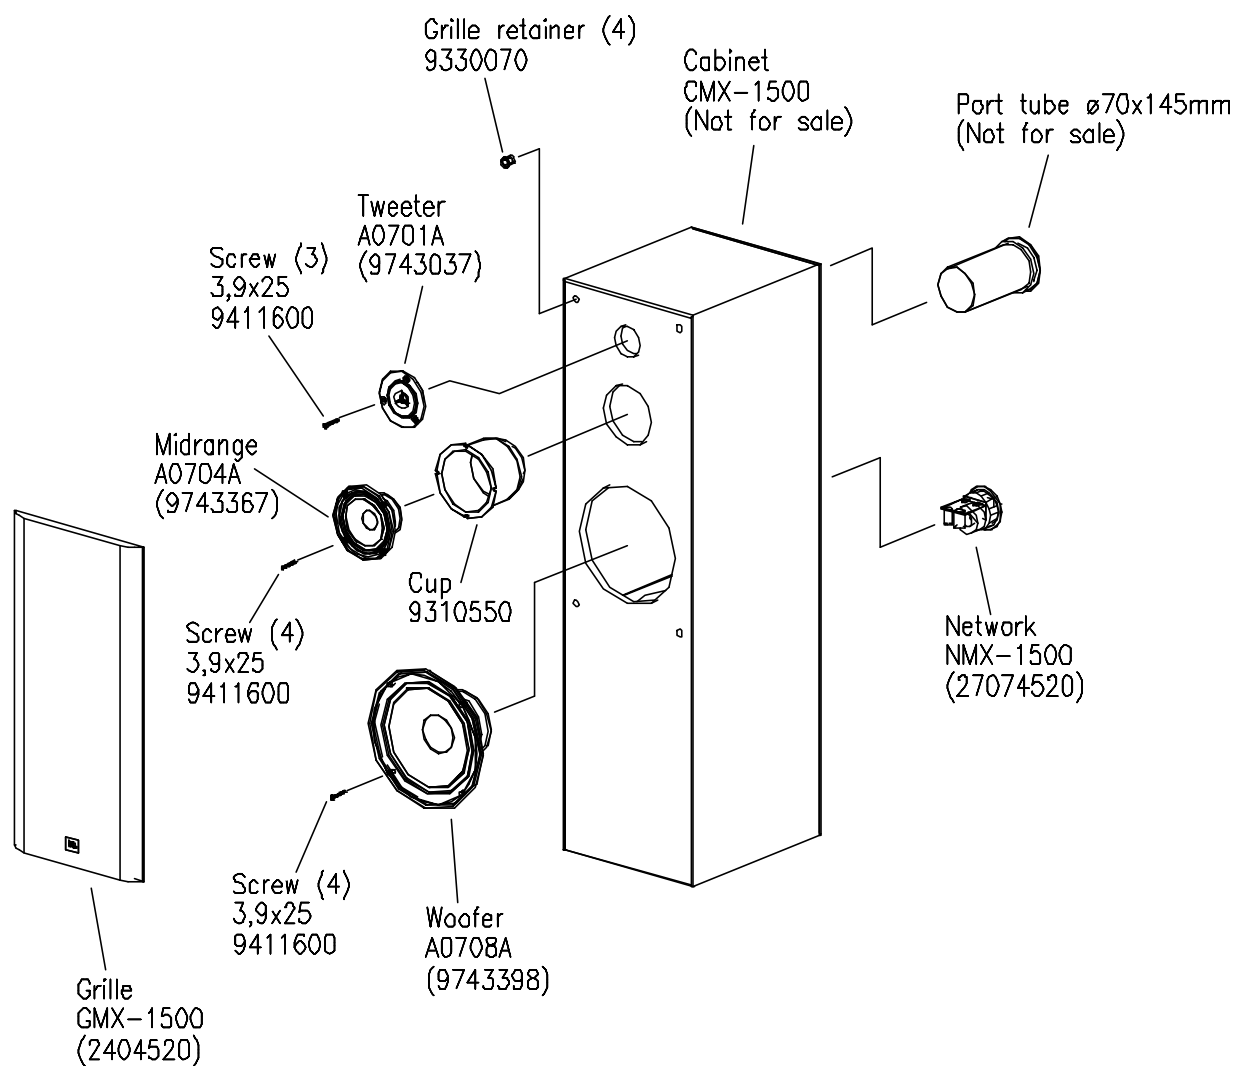

MX-1500