


TF0410MR



Features

- 4" mid-range driver providing 90dB sensitivity and 30Wrms (AES standard) power handling
- 1" high temperature copper voice coil wound on polyimide former for increased reliability
- Very compact model suitable for use in 3-way systems
- Optimised to deliver detailed reproduction of mid-range frequencies
- Closed back chassis simplifies cabinet manufacture, eliminating need for separate mid-range enclosure

8 Frequency Response

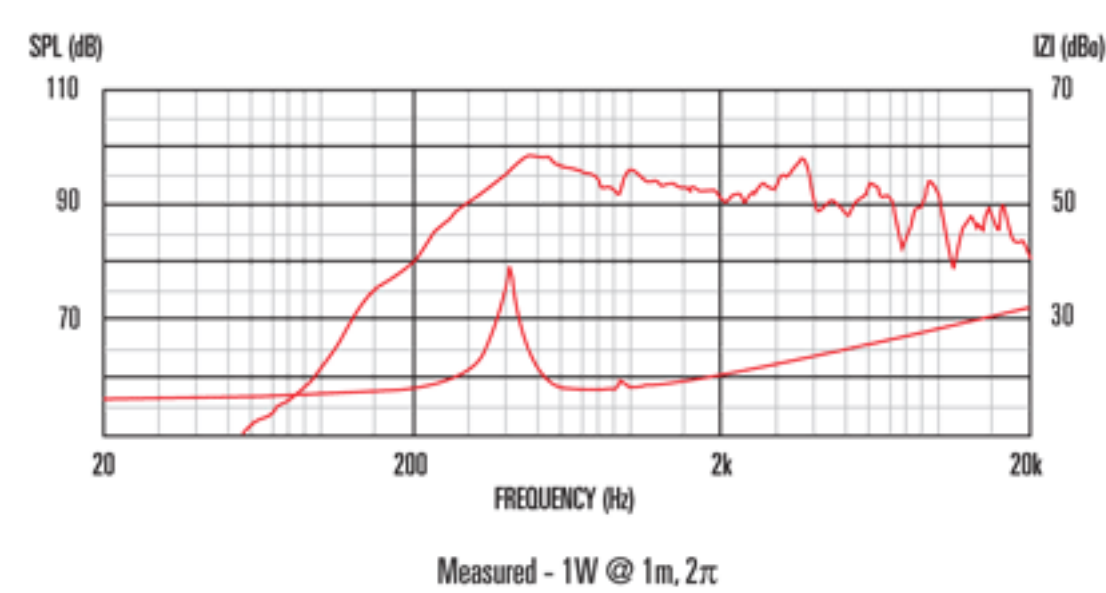

1.

Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.
2.

Measured on axis at 1W, 1m in 2 anechoic environment.

General Specifications

Chassis type	Pressed steel
Coil material	Round copper
Cone material	Kevlar loaded paper
Former material	Polyimide
Frequency range	400-4000Hz
Magnet type	Ferrite
Magnet weight	0.48kg/17oz
Nominal diameter	100mm/4in
Nominal impedance	8
Power rating ¹	30Wrms
Sensitivity ²	90dB
Surround material	Treated paper
Suspension	Single
Voice coil diameter	25mm/1in

Small Signal Parameters

Fs	400Hz
Re	5.65

Mounting Information

Cut-out diameter	95mm/3.7in
Diameter	120mm x 108.5mm/4.7in x 4.3in
Mounting PCD range	109mm/4.3in
Mounting slot dimensions	Ø 4.3mm/0.17in
Number of mounting slots	4
Overall depth	60mm/2.4in
Unit weight	1.2kg/2.6lb

Packed Dimensions & Weight

Multi pack (12) weight	20kg/44lb
Multipack (12) size W x D x H	425mmx280mmx165mm /16.7in x 11.0in x 6.5in