


All Capacitors are COG Dielectric 50 or 100VDC
 Shown in single-ended select mode

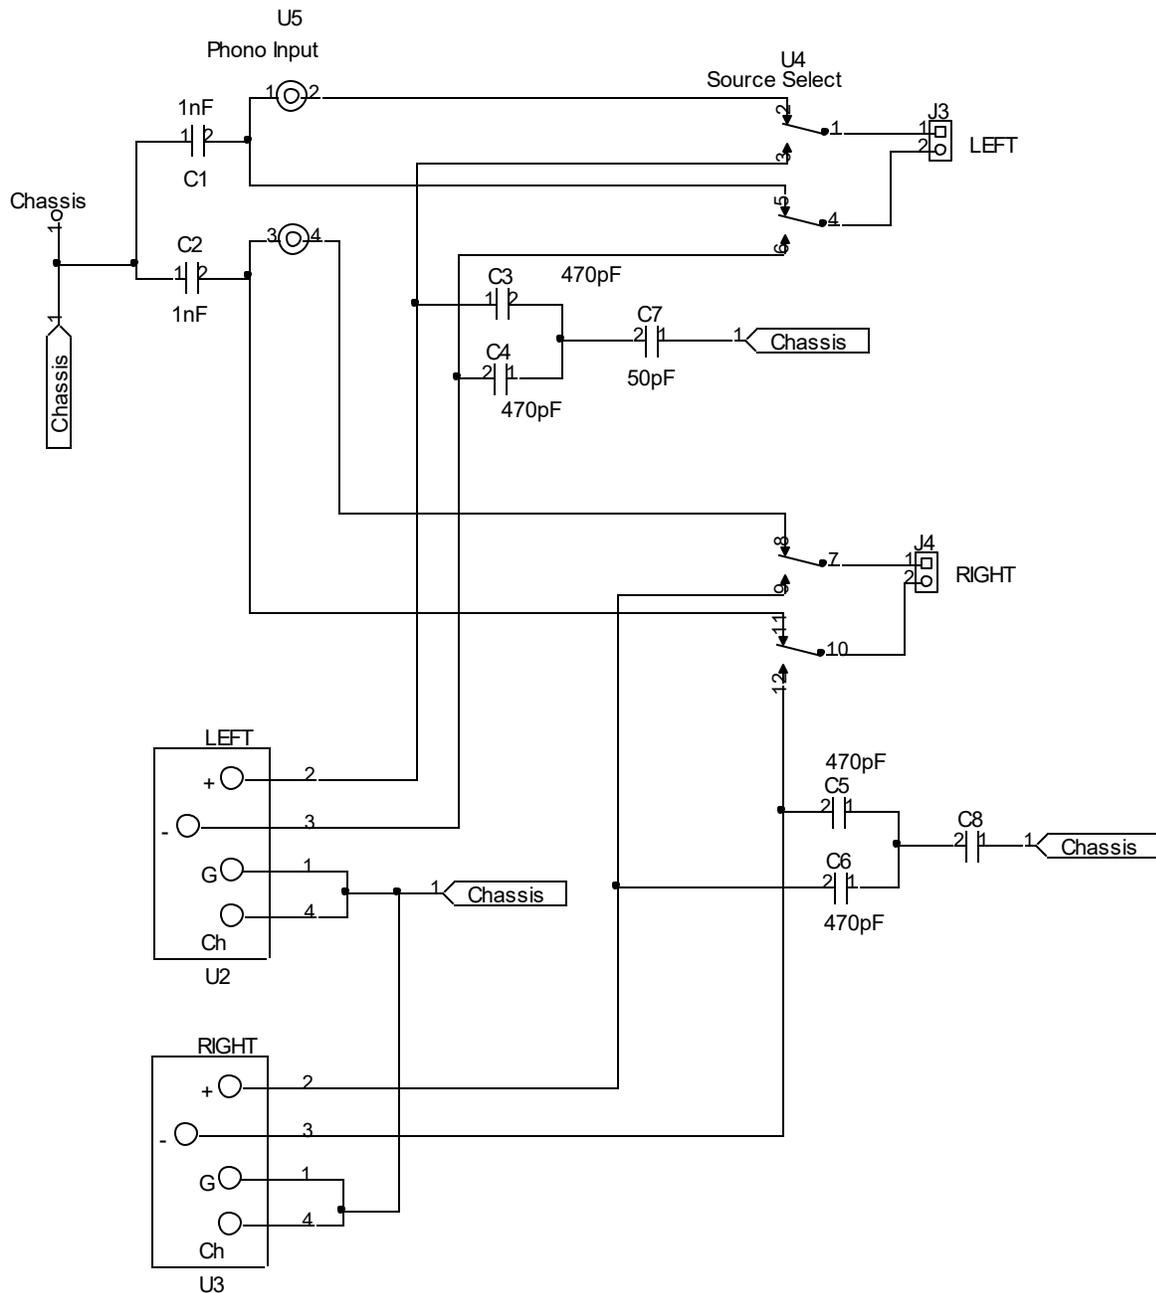

XLR \leftrightarrow RCA switching. The Receiver chip is a THAT1240 series device and is located on the main amplifier PCB.